

# W005 THRU W10

## SINGLE PHASE 1.0 AMPS. SILICON BRIDGE RECTIFIERS


**Voltage Range**  
50 to 1000 Volts  
**Current**  
1.0 Amperes

### FEATURES

- UL Recognized File # E-230084
- Surge overload ratings to 40 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed:  
250°C / 10 seconds / 0.375" (9.5mm)  
lead length at 5 lbs., (2.3Kg ) tension

### Mechanical Data

- Case: Molded plastic
- Lead: Solder plated
- Polarity: As marked
- Weight: 1.10 grams

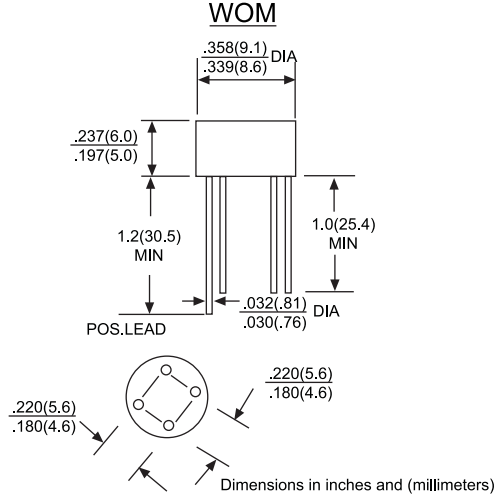

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number		W005	W01	W02	W04	W06	W08	W10	UNITS
Maximum Repetitive Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA = 50°C	IF(AV)	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	40							A
Maximum Instantaneous Forward Voltage Drop Per Leg@1.0A	VF	1.0							V
Maximum DC Reverse Current at Rated DC Blocking Voltage TA = 25°C TA = 100°C	IR	10 500							µA µA
Operating Temperature Range	TJ	-55 to+125							°C
Storage Temperature Range	TSTG	-55 to+150							°C

# RATING AND CHARACTERISTIC CURVES W005 THRU W10

FIG.1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

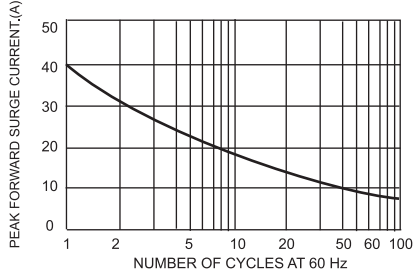


FIG.2 - MAXIMUM FORWARD CURRENT DERATING CURVE

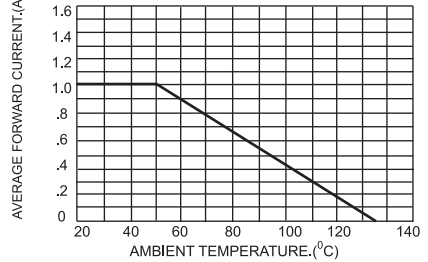


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

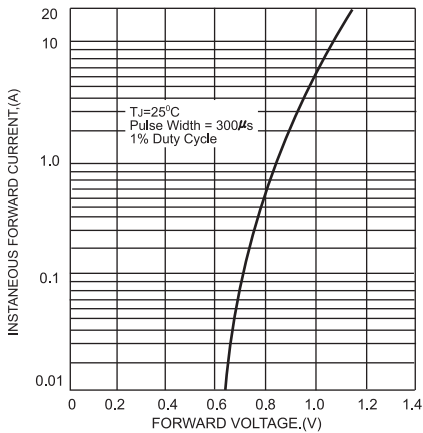


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

